

SEQUENCE TIMER

时间控制器

TCT 800

Respectively control of maximum eight gates at the same time , used for both Hydraulic or Pneumatic application.

Two operating modes available for each gate (A & B MODE).

Unique and useful color change function, automatic and manual mode for individual gate control.

Automatically save historical data when the power is turned off.

Available in 24V DC (exclusive for hydraulic) and 220V DC.

Each gate can be controlled between 0.1s to 99.9s.



可同时分别调控最多8个GATE的注塑时间。油气阀通用支持。

每个GATE支持两种工作模式（A，B MODE）。

独特实用的换色功能（Color Change），支持手动与自动模式。


将电源OFF时，对于设定过的数据自动保存记忆。

电磁阀支持输出电压AC220V,DC24V（油阀专用）。


每个GATE可控范围在最小0.1秒-最大99.9秒。

1) Color Change Mode (换色模式)


Normal (一般)

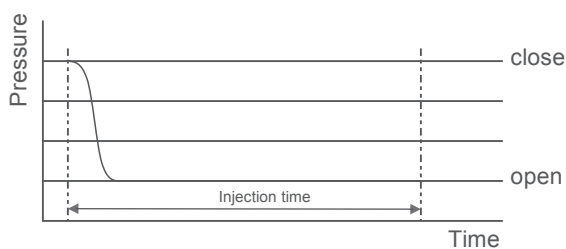


Color Change (换色)

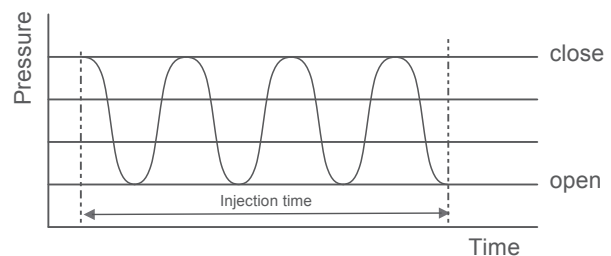

2) Mode A (模式A)

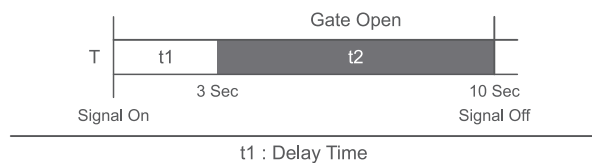

3) Mode B (模式B)

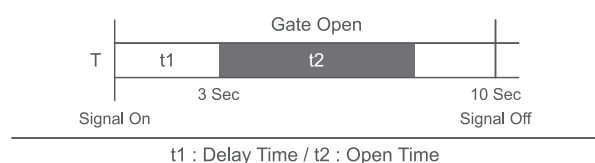


SEQUENCE TIMER

时间控制器


TW600

Easy to set and adjust parameters.
Manual gate opening and closing function.
Optional solenoid valve configurations: Hydraulic or Pneumatic.
Support various operating modes (A / B / C MODE).
Real-time display at operation.
Data saving function activated in power-off condition
High precision time control (Min 0.01sec ~Max999sec).


调整数值及设置时间，操作简便。
显示电磁阀输出电压。
浇口手动开/关功能。
电磁阀可选气压或油压配置。
支持多种操作模式（A/B/C 三种模式）。
实时显示运行状态。
关机状态下，数据存储功能启动。
精确的时间控制（最小0.01秒，最大999秒）。
软件控制电源开/关。

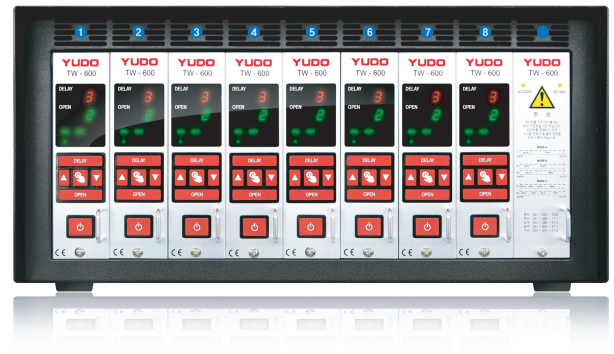

1) Mode A (模式A)

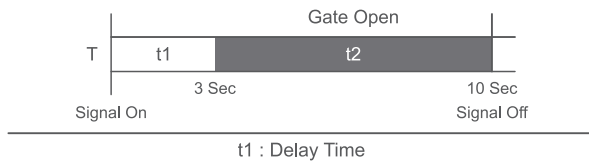

2) Mode B(模式B)

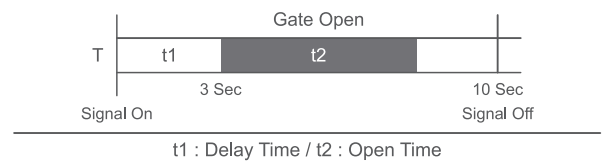

3) Mode C(模式C)

