

BALA System

BALA喷嘴是YUDO全球标准，市场服务广泛，操作简单，稳定性好

加热器导线设计于B板反面，更换、保养时不需拆卸模板

流道设计与模流分析结合，实现最佳的平衡注塑

针阀式、开放式多种规格型号，根据塑胶材料特性为客户提供最优质方案

BALA system is YUDO global standard nozzle

Assemble heaters on bottom of holding plate, easy maintenance

Stable system for general resin

Open and valve type, various structure of tip and bushes, wide options for customer



YUDO全球标准

系统热量平衡，注塑稳定

开放式、针阀式多种喷嘴类型

YUDO global standard

Superior heat balance & stable injection

Offer open & valve type




柳道万和（苏州）热流道系统有限公司
YUDO(SUZHOU) HOT RUNNER SYSTEMS CO.,LTD.
TEL: (86)512-6504-8882 FAX: (86)512-6504-6886
E-mail: suzhou@yudosuzhou.com

东莞柳道贸易有限公司
YUDO TRADING CO.,LTD.
TEL: (86)769-8539-4466 FAX: (86)769-8539-4455
E-mail: info@yudo.com.cn

青岛柳道贸易有限公司
YUDO (QINGDAO) TRADING CO.,LTD.
TEL: (86)532-8765-1698 FAX: (86)532-8765-1632
E-mail: qingdao@yudoqingdao.com

Parameter


BALA CC




BALA SOE




BALA TOE




BALA TLC




BALA TAC




BALA VC




BALA VV



BALA TVA




BALA TVL




Unit:mm

System Size		Runner	Valve pin	Length	Injection Volume
BALA 18	Open	06	--	75-285	120g
	Valve	08	4	75-285	
BALA 25	Open	08	--	90-400	240g
	Valve	10	4	90-400	
BALA 35	Open	10	--	90-600	800g
	Valve	15	6	90-600	
BALA 45	Open	15	--	110-900	1000g
	Valve	22	8/10	110-900	

Applications

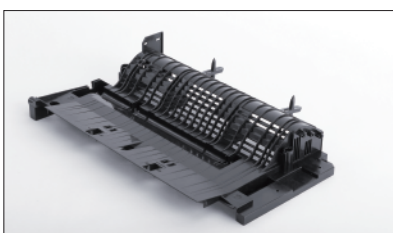

Printer Parts

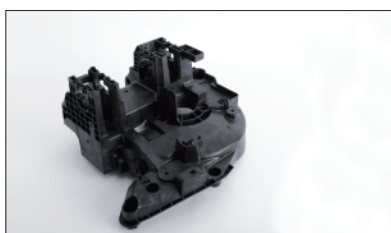

Automobile Parts



TV Back cover